



MP-84

- Active Bi-Amplified DSP 2-Way MiniPort Ceiling Speaker
- Ultra-wide dispersion for a larger listening sweet-spot and enhanced immersion
- High sound pressure levels in a compact package
- Aluminum enclosure
- Exceptional Dynamics and Bandwidth
- Patented Novel 21st Century technology
- Integration-friendly



106dB In-Room SPL



Digital Signal Processing EQ



Calibration, Diagnostics and
24/7 Monitoring Over IP

GrimaniSYSTEMS
IMMERSIVE SOUND POWER



Grimani.tv





Grimani Systems



+1 (415) 883 1476



Novato, CA 94949 USA

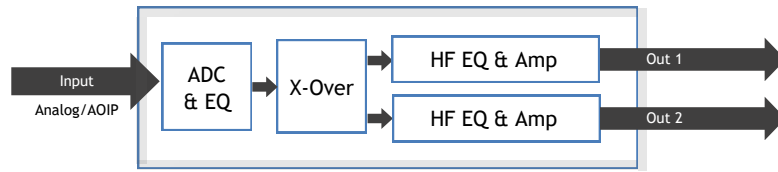

EQ/Amp/Spkr Block Diagram



Aperture Grille Options:

4" Round or 4" Square


Flush magnetic grilles are paintable and virtually invisible.



2~4 Channel DSP Power Amp
2 channels per speaker

Basic Specifications:

- 4" Flush Grilles - Round or Square
- 8" woofer / 2" tweeter
- Max SPL 1m Long-Short: 100-106dB
- 40Hz to 20kHz
- 320W rack-mounted amplifier
- 2-way DSP x-over and room EQ
- 26"L x 13"W x 8"D
- 34 lbs

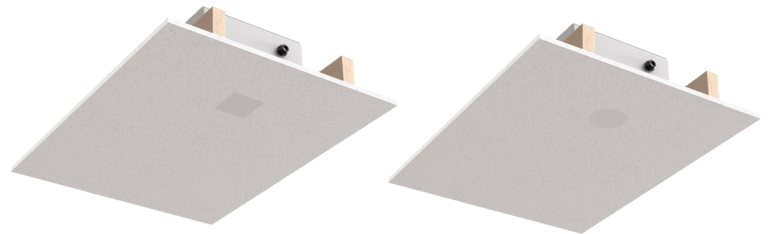

Responses: Listening Window and Sound Power

GrimaniSystems SA84. Listening Window (Blue), Early Reflection (Green); Sound Power (Red)

